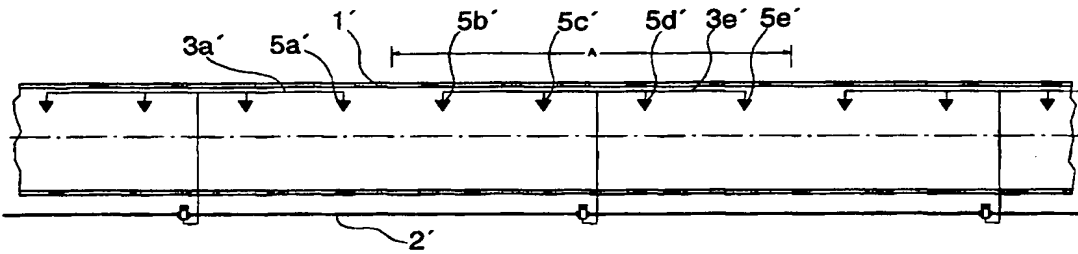


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>6</sup> : <b>A62C 35/64, 35/58</b></p>	<b>A1</b>	<p>(11) International Publication Number: <b>WO 99/13949</b></p> <p>(43) International Publication Date: 25 March 1999 (25.03.99)</p>								
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: PCT/FI98/00712</p> <p>(22) International Filing Date: 11 September 1998 (11.09.98)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">973695</td> <td style="width: 33%;">15 September 1997 (15.09.97)</td> <td style="width: 33%;">FI</td> </tr> <tr> <td>974465</td> <td>9 December 1997 (09.12.97)</td> <td>FI</td> </tr> </table> <p>(71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b></p> <p><i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> </td> </tr> </table>			<p>(21) International Application Number: PCT/FI98/00712</p> <p>(22) International Filing Date: 11 September 1998 (11.09.98)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">973695</td> <td style="width: 33%;">15 September 1997 (15.09.97)</td> <td style="width: 33%;">FI</td> </tr> <tr> <td>974465</td> <td>9 December 1997 (09.12.97)</td> <td>FI</td> </tr> </table> <p>(71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	973695	15 September 1997 (15.09.97)	FI	974465	9 December 1997 (09.12.97)	FI	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b></p> <p><i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(21) International Application Number: PCT/FI98/00712</p> <p>(22) International Filing Date: 11 September 1998 (11.09.98)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">973695</td> <td style="width: 33%;">15 September 1997 (15.09.97)</td> <td style="width: 33%;">FI</td> </tr> <tr> <td>974465</td> <td>9 December 1997 (09.12.97)</td> <td>FI</td> </tr> </table> <p>(71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).</p> <p>(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	973695	15 September 1997 (15.09.97)	FI	974465	9 December 1997 (09.12.97)	FI	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b></p> <p><i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>			
973695	15 September 1997 (15.09.97)	FI								
974465	9 December 1997 (09.12.97)	FI								
<p>(54) Title: FIRE FIGHTING APPARATUS</p> <div style="text-align: center; margin: 10px 0;">  </div>										
<p>(57) Abstract</p> <p>The invention relates to a fire fighting apparatus comprising a plurality of spray heads (5a' to 5e'), a tube system (2', 3a', 3e') for leading extinguishing medium from an extinguishing medium source (2') having a volume for extinguishing medium to the spray heads, at least one drive gas source for driving extinguishing medium at a high pressure via the tube system to the spray heads, and release means for activating at least one of the spray heads. In order that the fire fighting apparatus may have simple structure and installation characteristics and, in addition to that, be usable for providing extinguishing liquid along very long distances, said at least one drive gas source is coupled to a long tube (2') constituting part of the tube system in such a way that the tube together with said at least one drive gas source constitutes a hydraulic accumulator and the volume of the source of extinguishing medium is constituted by the volume of the tube at least to a substantial extent.</p>										

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NI	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## FIRE FIGHTING APPARATUS

### BACKGROUND OF THE INVENTION

The invention relates to a fire fighting apparatus comprising a plurality of spray heads, a tube system for leading extinguishing medium from an extinguishing medium source having a volume for extinguishing medium to the spray heads, at least one drive gas source for driving extinguishing medium at a high pressure via the tube system to the spray heads and release means for activating at least one of the spray heads. Such fire fighting apparatuses are known e.g. from the International Patent Application with the publication number WO 92/22353.

Prior art fire fighting apparatuses comprise one container or a number of containers for extinguishing medium, the containers being positioned adjacent to each other and arranged to deliver extinguishing medium via a tube system to spray heads or sprinklers. The length and shape of the tube system depend on the application and the operating principle. Fire fighting apparatuses for bigger spaces, such as hotels, ships and industrial buildings, often have long tube systems.

The source of extinguishing medium of the fire fighting apparatuses in said applications can be e.g. the water mains, or a water container, from which water is pumped to the spray heads. Alternatively, the source of extinguishing medium can be a water bottle, to which is coupled a pressure gas bottle capable of driving the water (or another extinguishing medium) out of the bottle to the spray heads. Such a combination constitutes a hydraulic accumulator.

Long tunnels are technically particularly difficult spaces to extinguish a fire in. The tunnels can have a length of several kilometres - even some ten kilometres - and a diameter of e.g. 3 metres. The tunnels often contain cables. A cable fire may cause great damage. Extinction of a fire in such long tunnels is assumed to be so difficult to arrange for technically that, in most cases, the tunnels do not contain any fire fighting system at all. In case if the length of the tunnel is some kilometres and the intention is to lead extinguishing liquid, such as water, into the tunnel via a tube from one end thereof to a distance of some kilometres from said tunnel end, a drive pressure so high is required that, on account of pressure losses in the tube, it cannot be generated, in practice.

## BRIEF DESCRIPTION OF THE INVENTION

The object of the present invention is to simplify the construction of such fire fighting apparatuses that are used for extinguishing fires in different major spaces and buildings and that are especially well suitable for use in long tunnels and the like. For this purpose, the invention is characterized in that  
5 said at least one drive gas source is coupled to a long tube constituting part of the tube system in such a way that the tube together with said at least one drive gas source constitutes a hydraulic accumulator and the volume of the source of extinguishing medium is constituted by the volume of the tube at  
10 least to a substantial extent. A long tube means in this connection primarily a tube having a length of the size of about 1 km and more.

An especially preferred embodiment of the invention is characterized in that a plurality of drive gas sources are arranged at a predetermined distance from each other along the tube. This embodiment suits particularly  
15 well for fighting fires in tunnels, the tube being in such applications a substantially straight tube. Here, the tube system has been built into the tunnel in the longitudinal direction thereof and the tube is preferably divided into a number of main sections, each one containing a drive gas source. The main sections are preferably divided into a number of zones, each one containing a group of  
20 spray heads or sprinklers. One group or several groups of spray heads or sprinklers are released at fire, when required.

Preferred embodiments of the invention are presented in attached claims 2 to 12.

An essential feature of the invention is to utilize the tube as a  
25 source of extinguishing medium for a hydraulic accumulator. Another essential feature is to position a number of drive gas sources along the tube, whereby the pressure losses can be kept on an acceptable level, and to use the tube as the source of extinguishing medium. This is possible, because the tube is long and may contain a relatively big volume of extinguishing medium. No  
30 separate liquid containers are needed for extinguishing liquid, when the tube is used as the source of extinguishing medium. The consumption of extinguishing medium will be small, when the spray heads used are of a type producing mist-like spray. Such a spray head is presented e.g. in the International Patent Application with the publication number WO 92/22353.

35 Thanks to the invention, a fire fighting apparatus has been provided which has a simple structure and installation and which is not dependent on

outer drive sources, such as electricity and pumps, and which, in addition, suits especially well for extinguishing fires in long tunnels. There is no need of separate sources of extinguishing medium, such as liquid bottles, and these can be omitted. The fire fighting apparatus is environment friendly when the  
5 extinguishing medium is water-based liquid.

#### BRIEF DESCRIPTION OF THE DRAWING

In the following, the invention will be described by means of two embodiments with reference to the attached drawing, in which:

10 Figure 1 shows a tunnel containing a fire fighting apparatus according to the invention;

Figure 2 illustrates a drive source of the fire fighting apparatus;

Figure 3 shows a cross-section of the tunnel of Figure 1;

Figure 4 shows a tunnel containing another embodiment of the fire  
15 fighting apparatus of the invention;

Figure 5 shows the drive source for the fire fighting apparatus of Figure 4; and

Figure 6 shows a cross-section of the tunnel of Figure 4.

#### 20 DETAILED DESCRIPTION OF THE INVENTION

Figure 1 illustrates a tunnel 1 for cables, in which tunnel is mounted a fire fighting apparatus according to the invention. The tunnel is e.g. 10 km long. A tube system is positioned in the tunnel 1 extending from one end thereof to the other end, the system comprising a long tube 2, from which extend shorter tubes 3a to 3e and 4a to 4e leading to spray heads or sprinklers  
25 5a to 5e and 6a to 6e, respectively. The spray heads may be of the type presented in the International Patent Application with the publication number WO 92/22353 and having a k factor of 1,9. The spray heads have at least two, but typically a plurality of nozzles, which are arranged geometrically in relation to  
30 each other in such a way and have such an opening and such a scattering angle that they produce a penetrating mist-like spray at high drive pressure. The consumption of extinguishing liquid is small in spite of that a long throw is achieved. The drive pressure is e.g. 70 bar.

The length of the tube 2 is divided into a number of zones A, each  
35 of them having a length of 22.5 m. In Figure 1, a zone A has eight spray

heads, i.e. the spray heads 5b to 5e and 6b to 6e, the distance between the spray heads adjacent to each other being 7.5 m. The eight spray heads form a group of spray heads arranged to be released simultaneously in case of fire within the zone A. The upper spray heads 5b to 5e in the group are arranged to spray to the right along the tunnel 1, while the lower spray heads 6b to 6e are arranged to spray in the opposite direction. Because the spray heads 5b to 5e are arranged one after the other in Figure 1, the sprays intensify each other. This is also true of the spray heads 6b to 6e. In the vicinity of each spray head, a suction is built up by the spray head itself when spraying, said suction taking in the extinguishing medium that is sprayed out of the spray head positioned behind: for example, the suction at the spray head 5c takes in the extinguishing medium coming from the spray head 5b. The suction at the spray head 6e is capable of taking in part of the extinguishing medium coming from the spray head 5d, and the suction at the spray head 5b is capable of taking in part of the extinguishing medium coming from the spray head 6c, though these spray heads are directed in the opposite direction. In this way, a circulation of mist-like extinguishing medium is provided upon activating the spray heads, which medium extinguishes the fire effectively. Reference numerals 7a to 7e indicate solenoid valves, or another type of valves, making the spray heads be released in the group desired. Accordingly, the solenoid valve 7a controls the spray heads 5a and 6a; and the solenoid valves 7b to 7e control the spray heads 5b to 5e and 6b to 6e. Figure 1 shows a situation in which the spray heads 5b to 5e and 6b to 6e have been released, while the spray heads 5a and 6a in the adjacent zone have not been released. The maximum number of spray heads being released at a fire may e.g. be  $8 + 4 + 4$ , the spray heads existing in three adjacent zones A. At fire extinction, a demand for a 10 min extinction by means of four spray heads may be 47 l gas at a pressure of 150 bar together with 150 l water or water-based liquid. In case if the maximum number of spray heads, i.e. 16, are released during a time of 30 min,  $3 \times 4 \times 150 \text{ l} = 1800 \text{ l}$  water is required. At the beginning of the spraying, the maximum pressure in the spray heads is kept at about 100 bar.

The reference numerals 8a and 8b indicate fire detector devices. These can be smoke detectors, detectors sensitive to heat or, in principle, any detectors giving a signal to the solenoid valves 7a to 7e. The fire detector 8a gives a signal to the solenoid valve 7a and opens this, while the fire detector 8b gives a signal to the solenoid valves 7b to 7e and opens these.

Figure 2 shows that the tube 2 comprises nitrogen bottles 9 to 12 and stop/opening valves 13 to 15 arranged in such a way that there always is one nitrogen bottle and one stop valve at the distance of 1 km. The nitrogen bottles 9 to 12, which together with the tube 2 form hydraulic accumulators, provide the extinguishing medium in the tube with a high pressure. The volume of the nitrogen bottles 9 to 12 is 50 litres and the pressure is 250 bar. The pressure loss in the tube 2 will be 133 bar at the maximum for the parameters stated. The loading pressure may preferably be within the pressure range of 30 to 400 bar, preferably 100 to 300 bar, depending on the length of the tunnel.

When the tube 2 is 10 km long and has an outer diameter of 25 mm and a wall thickness of 2.5 mm, the content of the tube will be about 3000 litres. Accordingly, the tube 2 contains about 3000 litres of water or water-based liquid, when the installation is in a standby state and the apparatus is ready to be released.

To begin with, the water in the tube 1 is obtained from a water mains 16 at a pressure higher than 3 bar. Reference numeral 17 indicates a filter and reference numeral 19 a valve enabling a filling of the tube 2. The valve 19 is open when the filling of the tube 2 with water is started. After the tube has been filled, the valve 19 is closed.

Figures 4 to 6 show another embodiment of the invention. Reference numerals used in the Figures 4 to 6 correspond to those used in the Figures 1 to 3 for the respective parts, an apostrophe being an extra addition. The embodiment of Figures 4 to 6 differs from the embodiment of Figures 1 to 3 therein that spray heads 5b' to 5e' in a group of spray heads or sprinklers to be released simultaneously are directed (orientated) differently. In the embodiment of Figure 4, a circulation of a mist of extinguishing medium is not provided, but all spray heads 5a', 5b' to 5e' spray downwards. It is conceivable that spray heads (not shown) are arranged downwards in the tunnel 1' to spray in the direction towards the spray heads 5e', 5b' to 5e' to provide a circulation of extinguishing medium, as described above. Another difference is that the tube 2' is arranged in a separate channel outside the tunnel 1'. A further difference is that only one solenoid valve 7' controls a whole group of spray heads 5b' to 5e' or sprinklers. From Figure 6 appears that the cross-section of the tunnel 1' is rectangular and from Figure 5 appears that the length of the tunnel is 3.6 km. No fire detector is drawn in Figure 4, though it

may exist, as described in connection with Figure 1. In case if 5b' to 5e' indicate sprinklers, i.e. spray heads with an ampoule being released by heat, the release of the group of sprinklers can be arranged to occur with any sprinkler of the group, whereby this releases the other sprinklers belonging to the  
5 group, preferably as described in the International Patent Application with the publication number WO 93/10860.

The invention is described above by means of one embodiment only, and therefore, it is pointed out that the details of the invention can be implemented in many ways within the scope of the attached claims. Accordingly,  
10 the length of the tube 2 may vary from the described one. In the application of the invention for extinguishing a fire in a tunnel, the tube length referred to is of the size of at least about 1 km and typically several kilometres, though a tube length of only some hundred metres can be actual in certain applications. It is conceivable that sprinklers, i.e. spray heads with separate release means,  
15 such as ampoules bursting at increased temperature, are possible instead of spray heads receiving a signal from a detector. Hereby, it is a sprinkler of a group of sprinklers in a zone (A) which makes the other sprinklers belonging to the zone be released. The fire fighting apparatus may comprise both sprinklers and spray heads, e.g. in such a way that a sprinkler is arranged in each zone  
20 (A) to release the spray heads existing in said zone. The length of the zones may vary as may the number of spray heads/sprinklers in the zones. Instead of nitrogen, the content of the gas bottles can be carbon dioxide, argon or another gas suitable for the purpose or a gas mixture at high pressure. The fire fighting apparatus may be installed in major spaces other than a tunnel, as  
25 was mentioned earlier.



## CLAIMS

1. A fire fighting apparatus comprising a plurality of spray heads (5a to 5e, 6a to 6e; 5a', 5b' to 5e'), a tube system (2, 3a to 3e, 4a to 4e; 2', 3a', 3e') for leading extinguishing medium from an extinguishing medium source  
5 having a volume for extinguishing medium to the spray heads, at least one drive gas source (9 to 12; 9' to 12') for driving extinguishing medium at a high pressure via the tube system to the spray heads and release means (8a, 8b) for activating at least one of the spray heads, **characterized** in that said at least one drive gas source (9 to 12; 9' to 12') is coupled to a long tube  
10 (2; 2') constituting part of the tube system in such a way that the tube together with said at least one drive gas source constitutes a hydraulic accumulator and the volume of the source of extinguishing medium is constituted by the volume of the tube at least to a substantial extent.
2. A fire fighting apparatus according to claim 1, **character-**  
15 **ized** in that a plurality of drive gas sources (9 to 12; 9' to 12') are arranged at a predetermined distance (l) from each other along the tube (2; 2').
3. A fire fighting apparatus according to claim 2, **character-**  
**ized** in that a stop/opening valve (13 to 15; 13' to 15') for closing and opening the flow of extinguishing medium in the tube (2; 2') is arranged between  
20 individual drive gas sources (9 to 12; 9' to 12').
4. A fire fighting apparatus according to claim 2, **character-**  
**ized** in that the tube (2; 2') is divided into a number of main sections (l), each of them containing a drive gas source (9; 9') having a high pressure.
5. A fire fighting apparatus according to claim 4, **character-**  
25 **ized** in that the drive gas sources are constituted by nitrogen bottles (9; 9') having a pressure of 30 to 400 bar.
6. A fire fighting apparatus according to claim 4, **character-**  
**ized** in that the main sections (l) comprise a number of zones (A), each of them containing a group of spray heads (5b to 5e, 6b, 6e; 5b' to 5e') or sprinklers.  
30
7. A fire fighting apparatus according to claim 6, **character-**  
**ized** in that release means (8a, 8b) are arranged along the tube (2; 2') within the zones (A) for releasing a group of spray heads (5b to 5e, 6b to 6e; 5b' to 5e') belonging to respective zone.
- 35 8. A fire fighting apparatus according to claim 7, **character-**  
**ized** in that each group of spray heads (5b to 5e, 6b to 6e; 5b' to 5e') con-

tains a solenoid valve (7b to 7e; 7') to control at least one spray head belonging to the group (5b to 5e, 6b to 6e; 5b' to 5e').

9. A fire fighting apparatus according to any one of the preceding claims for being used in a tunnel (1; 1'), **c h a r a c t e r i z e d** in that the  
5 tube system (2, 3a to 3e, 4a to 4e; 2', 3a', 3e') follows the longitudinal direction of the tunnel (1; 1').

10. A fire fighting apparatus according to claim 9, **c h a r a c t e r - i z e d** in that the spray heads comprise first spray heads (5b to 5e) arranged in an upper part of the tunnel (1) and second spray heads (6b to 6e) arranged  
10 in a lower part of the tunnel, whereby the first spray heads are arranged to spray mainly in the opposite direction with respect to the second spray heads.

11. A fire fighting apparatus according to claim 1, **c h a r a c t e r - i z e d** in that the spray heads (5a to 5e, 6b to 6e; 5a' to 5e') are of a type capable of producing a mist-like spray.

15 12. A fire fighting apparatus according to claim 1, **c h a r a c t e r - i z e d** in that the extinguishing medium is water-based liquid.

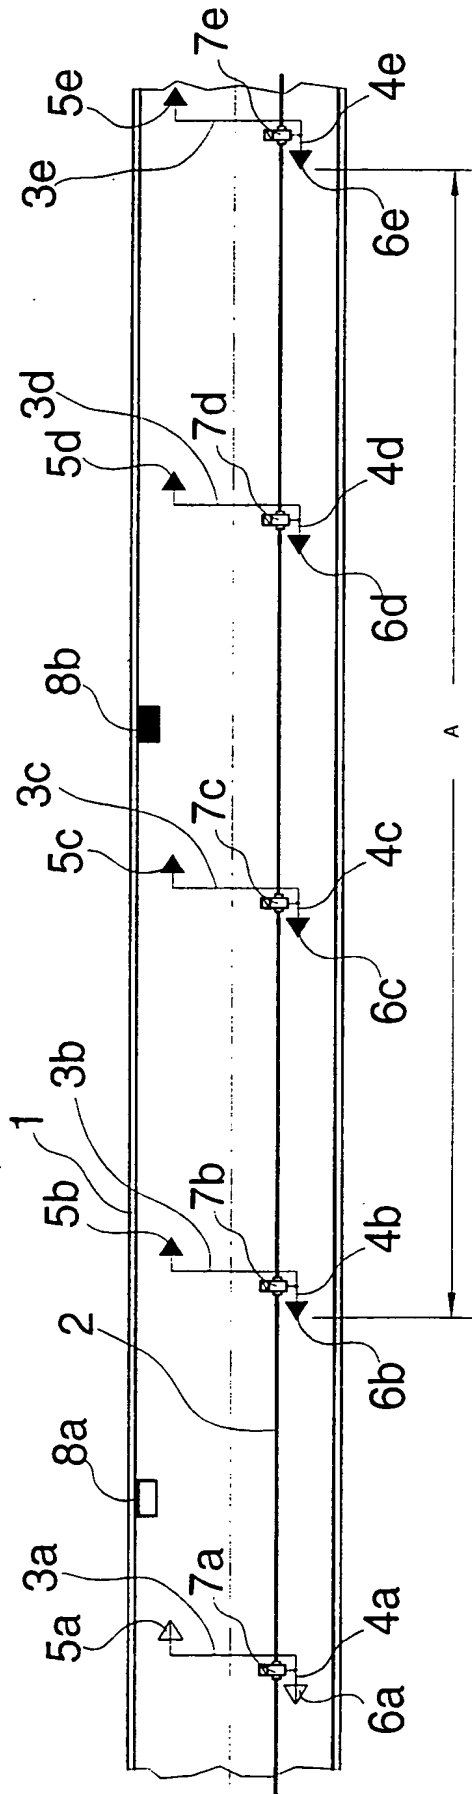


Fig 1

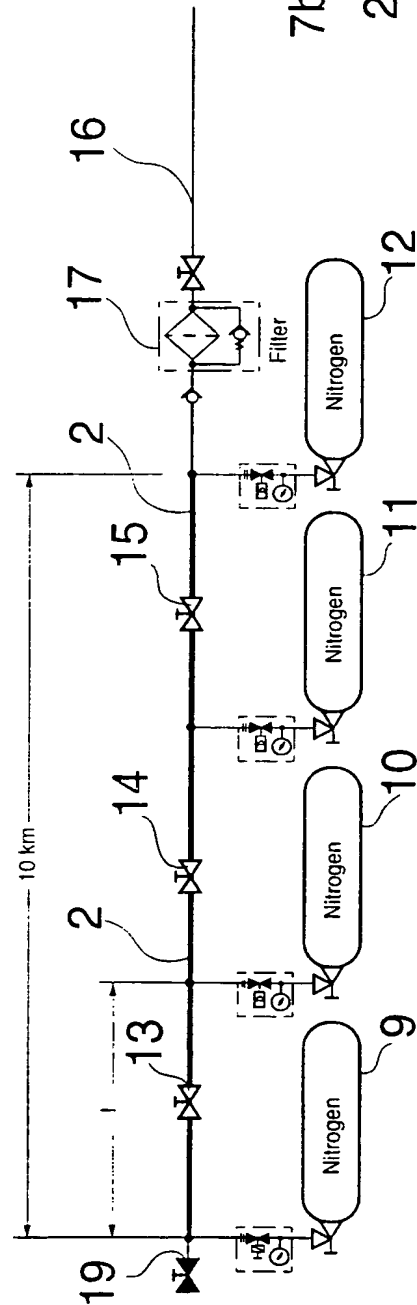


Fig 2

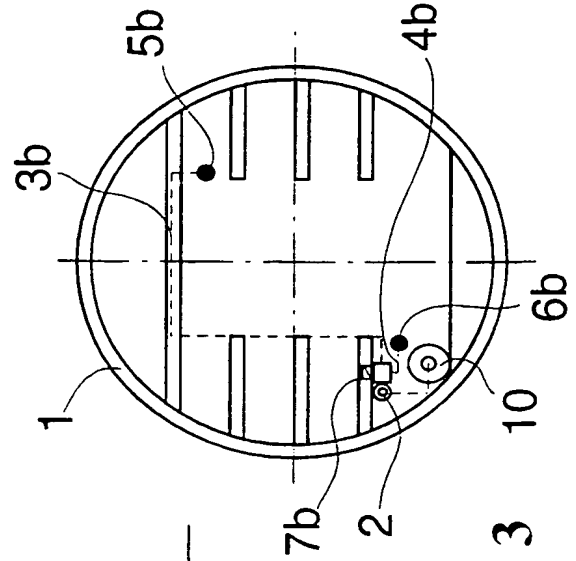


Fig 3

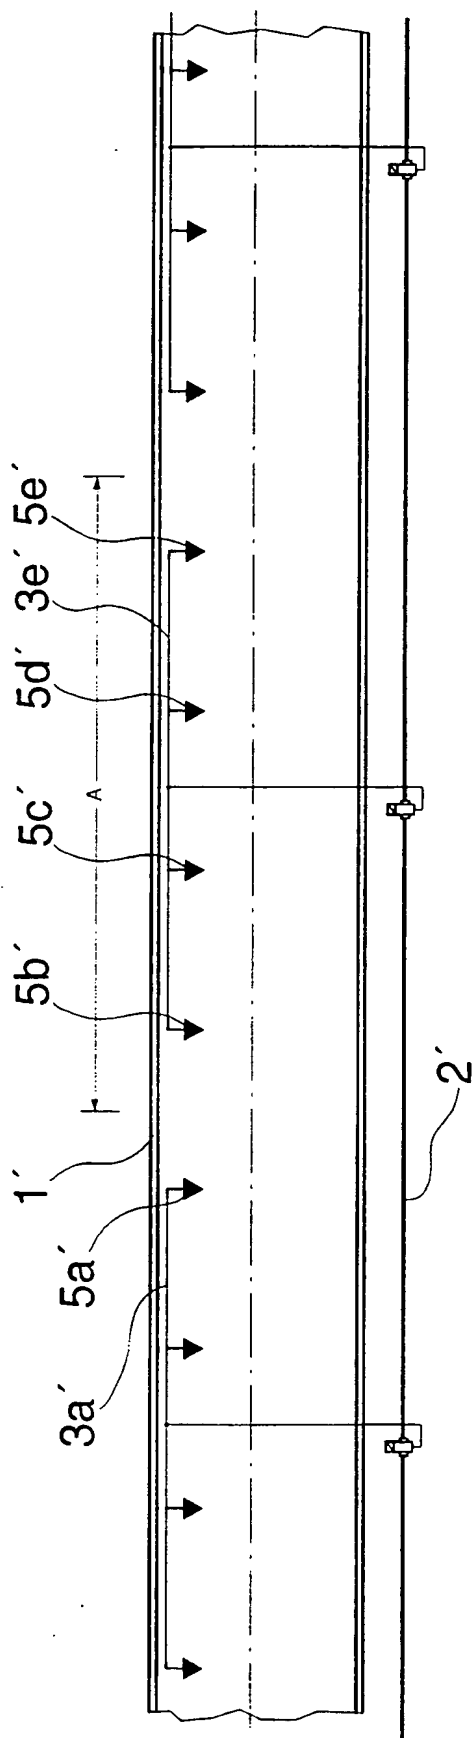


Fig 4

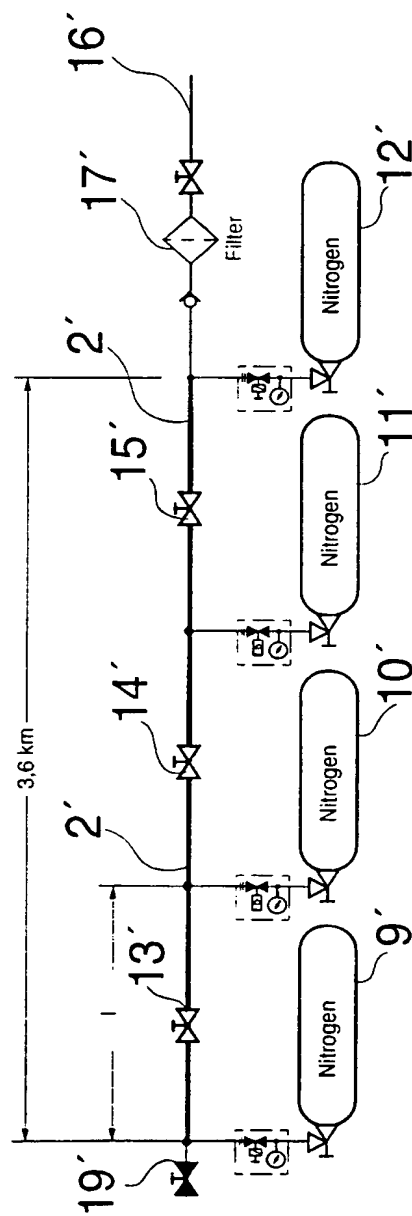


Fig 5

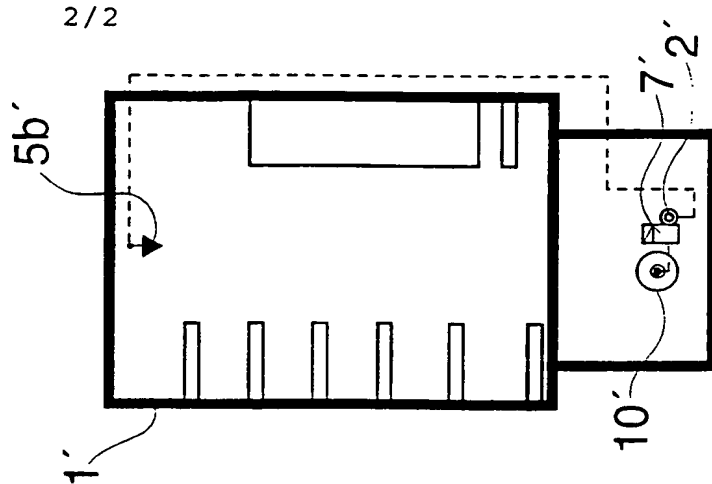


Fig 6

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00712

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A62C 35/64, A62C 35/58

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A62C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL, EDOC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9310860 A1 (SUNDHOLM, GÖRAN), 10 June 1993 (10.06.93), page 4, line 27 - page 5, line 13, claims 1-4, abstract  --	1-12
A	WO 9222353 A1 (SUNDHOLM, GÖRAN), 23 December 1992 (23.12.92), page 1, line 28 - page 2, line 9; page 3, line 1 - line 12, claim 2, abstract  -----	1-12

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 January 1999

Date of mailing of the international search report

15 -01- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Johnny Claesson

Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

01/12/98

International application No.

PCT/FI 98/00712

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9310860 A1	10/06/93	AT 148834 T AU 672957 B AU 2946692 A BR 9206816 A DE 69217502 D,T DK 614391 T EP 0614391 A,B SE 0614391 T3 ES 2086269 T FI 100948 B FI 915575 D FI 915669 D FI 942385 A JP 7501250 T NO 941944 A US 5531275 A	15/02/97 24/10/96 28/06/93 07/11/95 28/05/97 21/07/97 14/09/94 01/07/96 00/00/00 00/00/00 00/00/00 24/05/94 09/02/95 15/07/94 02/07/96
WO 9222353 A1	23/12/92	AT 142521 T AT 172126 T AU 662727 B AU 670534 B AU 1327192 A AU 1971492 A BR 9205688 A BR 9206163 A CA 2104302 A CA 2111232 A DE 69213735 D,T DE 69227325 D DK 589956 T EP 0589956 A,B SE 0589956 T3 EP 0665761 A,B ES 2093834 T FI 96175 B,C FI 913018 A FI 935717 A JP 6504936 T JP 6511160 T NO 301051 B NO 303529 B NO 934651 A RU 2077905 C RU 2091101 C SG 48277 A SG 49827 A US 5513708 A US 5713417 A US 5810090 A WO 9215370 A FI 922020 D FI 922355 A	15/09/96 15/10/98 14/09/95 25/07/96 06/10/92 12/01/93 17/05/94 22/11/94 29/08/92 23/12/92 23/01/97 00/00/00 30/09/96 06/04/94 09/08/95 01/01/97 15/02/96 29/08/92 14/02/94 09/06/94 15/12/94 08/09/97 27/07/98 09/02/94 27/04/97 27/09/97 17/04/98 15/06/98 07/05/96 03/02/98 22/09/98 17/09/92 00/00/00 06/11/93

BEST AVAILABLE COPY